
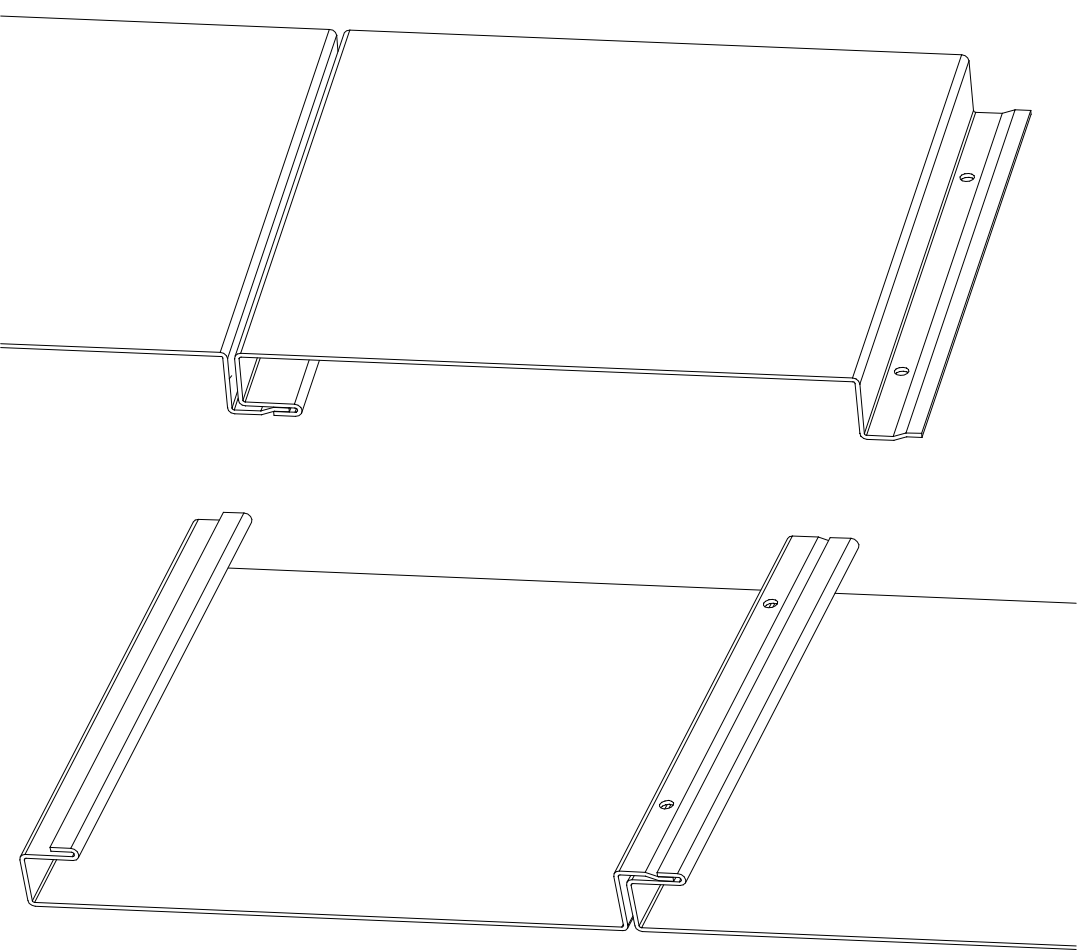


CYR 700

Panel with crushed fold for concealed screws fitting into each other.
Aluminum 2mm [0.08"] (3003-H14 for painting & 5005-H34 for anodizing).
Spacing between panels of 3.2mm [0.125"].
Manufacturing of panels of regular & special forms.
Several finishes available: natural, anodizing, powder or liquid paint.
Variable depth.

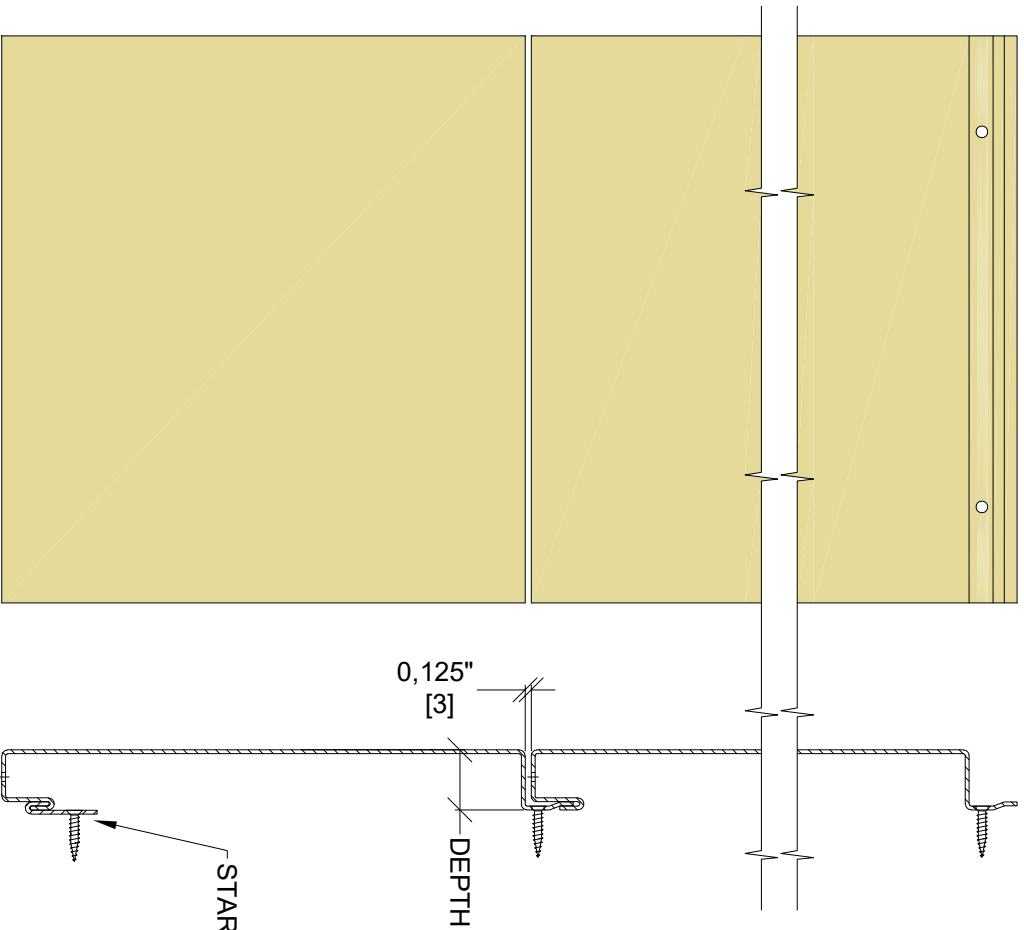


TITRE: CYR 700 - TYPICAL DETAIL

PROJET: INSTALLATION GUIDE - TECHNICAL DETAILS


NO.: 1/2

1101 Rue Louis-Marchand
Beloeil, Qc, J3G 6S4
450-467-2434
www.cyrell.qc.ca




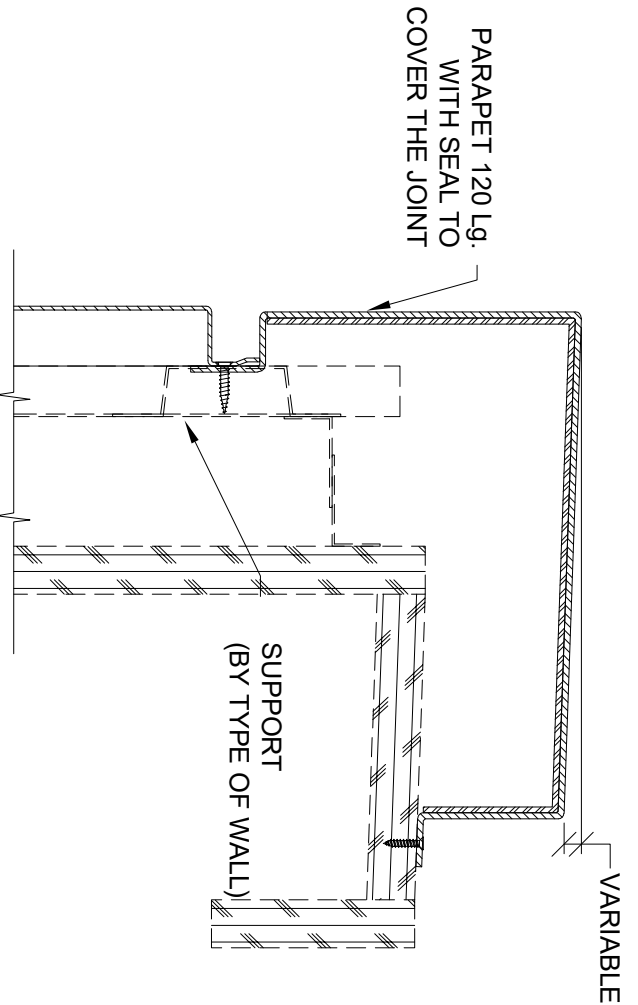


PARAPET DETAIL
(ELEVATION VIEW)

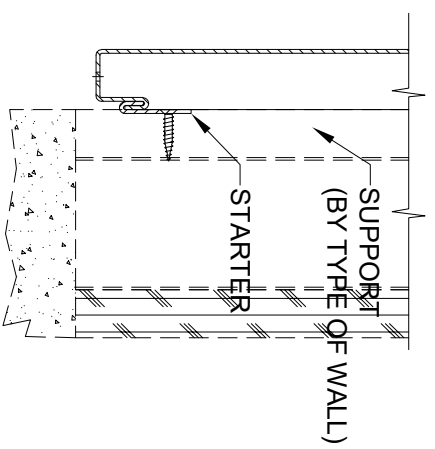

STARTING PANEL DETAIL
(ELEVATION VIEW)

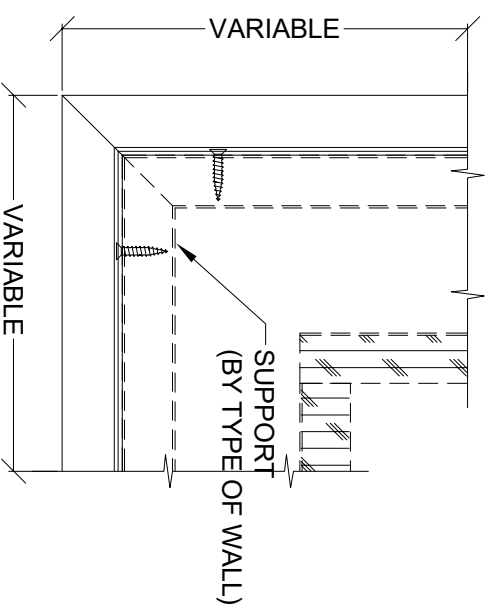

OUTSIDE CORNER DETAIL
(PLAN VIEW)

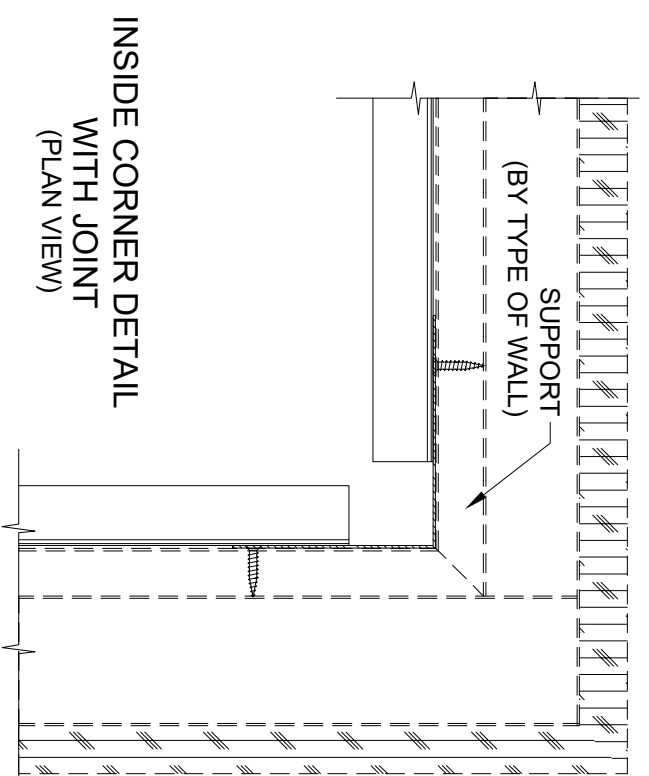

INSIDE CORNER DETAIL
WITH JOINT
(PLAN VIEW)

CYRELL
AMP

1101 Rue Louis-Marchand
Beloeil, Qc, J3G 6S4
450-467-2434
www.cyrell.qc.ca

TITRE:	CYR 700 - TYPICAL DETAIL	NO.:	
PROJET:	INSTALLATION GUIDE - TECHNICAL DETAILS		
THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE REPRODUCED OR USED WITHOUT THE WRITTEN CONSENT OF CYRELL AMP			
			2/2